

Premium Modules
MADE IN GERMANY




20 Years
product warranty

Premium Modules
MADE IN GERMANY

Premium L poly

285 W

- High efficiency, high safety, high reliability
- Highly transparent self-cleaning glass
- Resistant to environmental influences: Passed salt mist and ammonia test
- PID-resistant
- Premium L: Improved innoframe stability

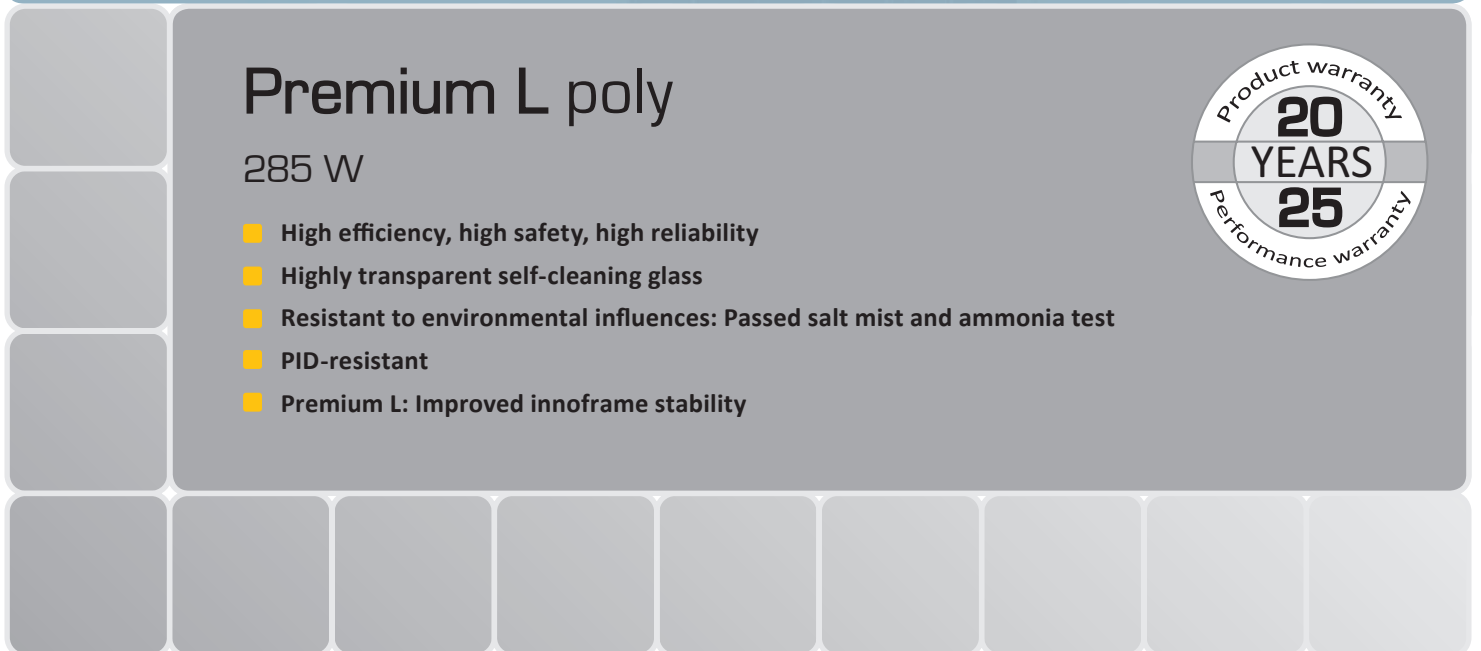

Premium L poly

Electrical data under STC (Standard Test Conditions: 1000 W/m², 25 °C, AM 1.5)

Rated power	P_{max}	285 W
Sorting limits of performance		0~+5 W
Voltage	U_{MPP}	31.25 V
Open circuit voltage	U_{OC}	39.21 V
Current	I_{MPP}	9.12 A
Short-circuit current	I_{SC}	9.51 A
Efficiency		17.10 %

Electrical data at 800 W/m², NOCT (ambient temperature 20°C, wind speed 1 m/s)

Power in MPP	P_{max}	209.39 W
Voltage	U_{MPP}	28.51 V
Open circuit voltage	U_{OC}	36.29 V
Current	I_{MPP}	7.35 A
Short-circuit current	I_{SC}	7.70 A

Temperature data

Power temperature coefficient	$T_K(P_{MPP})$	-0.43 %/K
Voltage temperature coefficient	$T_K(U_{OC})$	-0.325 %/K
Current temperature coefficient	$T_K(I_{SC})$	0.04 %/K

Further information

Number of cells	60
Max. system voltage	1000 V
Reverse current loading capability	15 A
Front cover	Special hardened low-iron glass with anti-reflex coating; Glare reduced to a minimum
Module connection	TE Solarlok Junction box 3 bypass diodes IP 67 no potting, 2 x approx. 0.95 m solar cable \varnothing 4 mm ² , plug connector PV4
Snow load*	Premium L poly innoframe framed: 5400 Pa $\hat{=}$ 550 kg/m ²

20-year product warranty, 25-year linear performance warranty according to our additional warranty conditions for solar power modules of the "Premium" product series, which we will gladly send you.

Subject to technical modifications with corresponding follow-up certifications. Errors excepted. Illustration similar.

*Load tested according to EN IEC 61215 (ed. 2) In compliance with the installation and operating manual.

Packaging Specifications

Truck	
Dimension pallet (L/W/H)	120/106/190 cm
Weight pallet	approx. 538 kg
Modules per pallet	28
Modules per truck	672

Shipment	
Dimension pallet (L/W/H)	120/106/190 cm
Weight pallet	approx. 538 kg
Modules per pallet	28
Modules per container [40' HC]	588

Certifications

EN IEC 61215 (ed. 2)¹

EN IEC 61730-1, -2¹

EN 13501-1, class E

Protection class II


Directive 2014/35/EU (CE)

Hail protection class 3

¹Subject to follow-up certifications.




Module performance



■ Linear performance warranty
■ Standard tiered warranty

Premium L poly
Weight: approx. 18.5 kg

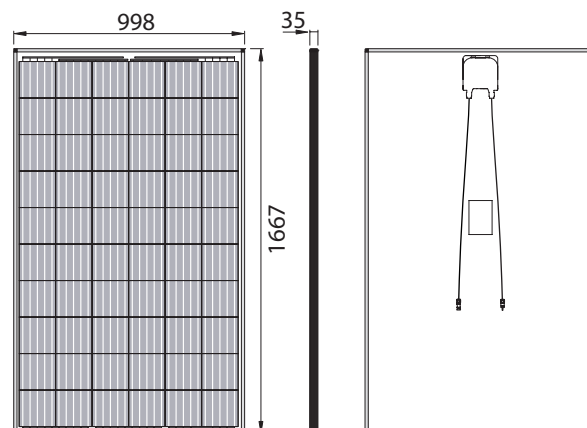

Note: Ensure correct polarity!

Your specialist dealer:

SF Solar Fabrik GmbH
Im Gewerbegebiet 12
63831 Wiesen
Germany

Phone: +49 (0)6096 9 700-790
Fax: +49 (0)6096 9 700-728
Mail: info@solar-fabrik.de
Web: www.solar-fabrik.de