

Mono S4 Halfcut | BC White

485 W / 490 W

Bifacial double-glass module with white grid lines and transparent backsheets featuring BC technology. The high-efficiency module is suitable for residential and commercial use.

Especially suitable for:



Residential



Commercial



German warranty

30-years guarantee on the product and 30-years on the module performance



Hail protection class 4

Resistant to ice balls with a maximum diameter of 40 mm and a speed of 29.2 m/s



Fire protection glass A

Best possible fire protection certification for solar modules with German TÜV certificate



Area utilisation factor

240 W/m² at 490 W. Better comparability through watt output per square metre



White Mesh

Transparent double glass solar module with a white print between the cells



Bifacial cell

Transparent cell with additional energy generation on the cell's backside



BC-technology

Back contact technology for higher light capture on the front side



N-type technology

solar module with N-Type technology for even more peak performance



Half-cell module

Two-part cell for more efficiency, more safety and more reliability




Anti-shading technology

Excellent performance even under partial shading, bypass diode at cell level



Glass cover

Resistant to ammonia & salt spray
Highly transparent, self-cleaning glass

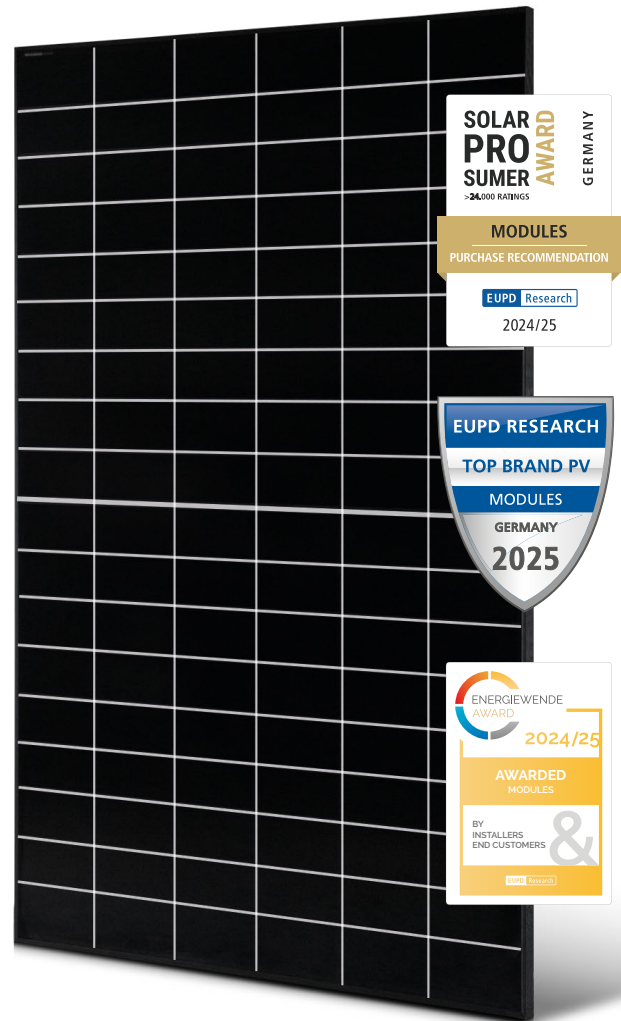

Mono S4 Halfcut | BC White

485 W / 490 W

Electrical data under STC

(Standard Test Conditions: 1000 W/m², 25 °C, AM 1.5, Measuring tolerance: ± 3%)

Rated power	P _{max}	485 W	490 W
Sorting limits of performance		0/+5 W	0/+5 W
Voltage	U _{MPP}	33.62 V	33.73 V
Open circuit voltage	U _{OC}	40.64 V	40.75 V
Current	I _{MPP}	14.43 A	14.53 A
Short-circuit current	I _{SC}	15.08 A	15.18 A
Efficiency		23.80 %	24.00 %


Temperature data

Operating temperature		- 40° C ~ + 85° C
Nominal operating cell temperature		45° C ± 2° C
Power temperature coefficient	T _K (P _{MPP})	- 0.260 %/°C
Voltage temperature coefficient	T _K (U _{OC})	- 0.200 %/°C
Current temperature coefficient	T _K (I _{SC})	0.050 %/°C

Further information

Number of cells	108 N-Type bifacial monocrystalline half cells (6 x 18)
Module dimensions	1800 x 1134 x 30 mm
Type of Frame	black anodized aluminium alloy
Max. system voltage	1500 V
Reverse current loading capability	30 A
Glass thickness	Frontside/Backside: 2.0 mm/2.0 mm
Weight	approx. 25.0 kg
Module connection	MC4 Stäubli EVO 2, 4.0 mm ² Cable length: (+) ≥ 1200 mm, (-) ≥ 1200 mm
Junction box rating	IP68
Allowable Hail Load	40 mm iceball with velocity of 29.2 m/s
Snow load	5400 Pa ≙ 550 kg/m ²
Fire class	A

30 years product warranty, 30 years linear performance warranty according to our additional warranty conditions for solar power modules of the "Mono S4 Halfcut BC White" product series, which we will gladly send you. Due to the tolerance of the anti-reflective coating, colour differences in the solar modules may occur.

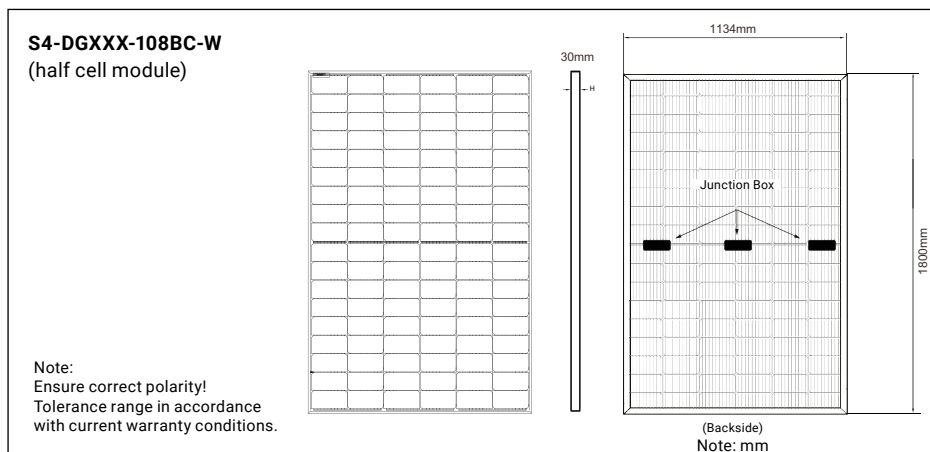


Errors and technical modifications are subject to change, with possible re-certifications. Image may differ.


Logistic

Dimension pallet (L/W/H)	182/111/125 cm
Weight pallet	approx. 930 kg
Modules per pallet	36
Modules per Container [40' HC]	864

Module performance

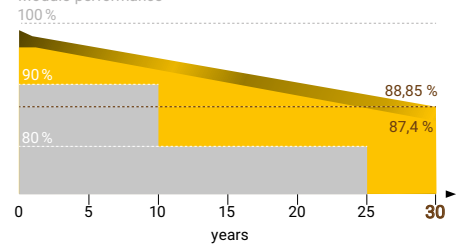

- Linear performance warranty for the BC series
- Linear performance warranty for SF glass-glass modules
- Standard tiered warranty

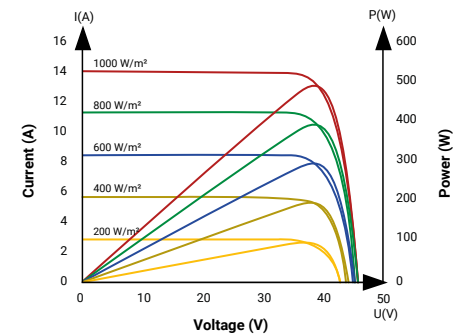

Your specialist dealer:

Solar Fabrik GmbH
Hermann-Niggemann-Str. 7-9
63846 Laufach
Germany

+49 (0)6093 20770-0
info@solar-fabrik.de
www.solar-fabrik.de

Valid as of: 24.02.2026
MD1004260224