

# Mono S5 Halfcut | Installer Series

300 W

The new Installer series in a „handy“ format is particularly suitable for angled roof areas with dormers and skylights in existing buildings and for repowering existing systems with classic formats. Double glass module with bifacial monocrystalline P-type/ PERC technology as a half cell.

Especially suitable for:



Residential



Commercial



### German warranty

30-year guarantee on the product and 30 years on the module performance



### Hail protection class 5

Resistant to ice balls with a maximum diameter of 50 mm and a speed of 32.2 m/s



### Fire protection glass A

Best possible fire protection certification for solar modules with German TÜV certificate.



### Area utilisation factor

207 W/m<sup>2</sup> at 300 W. Better comparability through watt output per square metre



### Transparent

Transparent double glass solar module



### Bifacial cell

Transparent cell with additional energy on the back of the cell



### P-Type technology

PERC solar module with P-Type technology for a top price/performance ratio



### Snow load 8.100 Pa

Mechanical load up to 8100 Pa in the test confirmed by TÜV.



### Low-light behaviour

Outstanding performance even under low light conditions



### Glass cover

Resistant to ammonia & salt spray  
Highly transparent, self-cleaning glass

# Mono S5 Halfcut | Installer Series

## 300 W

### Electrical data under STC

(Standard Test Conditions: 1000 W/m<sup>2</sup>, 25 °C, AM 1.5, Measuring tolerance: ± 3%)

Rated power	$P_{max}$	300 W
Sorting limits of performance		0/+5 W
Voltage	$U_{MPP}$	34.44 V
Open circuit voltage	$U_{OC}$	41.70 V
Current	$I_{MPP}$	8.71 A
Short-circuit current	$I_{SC}$	9.27 A
Efficiency		20.70 %

### Temperature data

Operating temperature		- 40° C ~ + 85° C
Nominal operating cell temperature		43° C ± 2° C
Power temperature coefficient	$T_K (P_{MPP})$	- 0.350 %/°C
Voltage temperature coefficient	$T_K (U_{OC})$	- 0.280 %/°C
Current temperature coefficient	$T_K (I_{SC})$	0.040 %/°C

### Further information

Number of cells	60 bifacial monocrystalline half cells (4 x 15)
Cell Size	210 x 210 mm
Module dimensions	1650 x 880 x 30 mm
Type of Frame	black anodized aluminium alloy
Max. system voltage	1500 V
Reverse current loading capability	15 A
Glass thickness	Frontside/Backside: 2.0 mm/2.0 mm
Weight	approx. 18.5 kg
Module connection	MC4 or similar, 4.0 mm <sup>2</sup> , cable length: (+) ≥ 900 mm, (-) ≥ 900 mm
Junction box rating	IP68
Allowable Hail Load	50 mm iceball with velocity of 32,2 m/s
Snow load	8,100 Pa test (5,400 Pa design: IEC 61215/61730 safety factor 1.5)
Fire class	A according to IEC standard 61730-2 (UL 790, UL 1703)

30-year product warranty, 30-year linear performance warranty according to our additional warranty conditions for solar power modules of the "Mono S5 Halfcut Installer Series 300W" product series, which we will gladly send you. Due to the tolerance of the anti-reflective coating, colour differences in the solar modules may occur.


**MS5 HC V XXX BF-DG**  
**MS5 HC V-XXX-BF-DG**  
**MS5 HC XXX BF-DG**  
 (half cell module)

Note:  
 Ensure correct polarity!  
 Data with tolerance ± 1 mm


### Logistic

Dimension pallet (L/W/H)	170/114/105 cm
Weight pallet	approx. 696 kg
Modules per pallet	36
Modules per truck	1008
Modules per Container [40' HC]	1008

### Module Performance

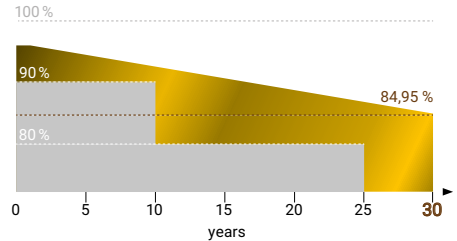

■ Linear performance warranty for Double-Glas Solar Modules  
 ■ Standard tiered warranty

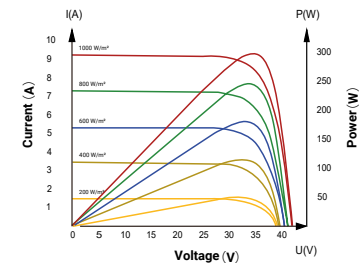

Your specialist dealer:

**Solar Fabrik GmbH**  
 Hermann-Niggemann-Str. 7-9  
 63846 Laufach  
 Germany

+49 (0)6093 20770-0  
 info@solar-fabrik.de  
 www.solar-fabrik.de