




Product Service

CERTIFICATE

No. Z2 115676 0007 Rev. 00

Holder of Certificate: **Solar Fabrik GmbH**
Hermann-Niggemann-Str. 7-9
63846 Laufach
GERMANY

Certification Mark:

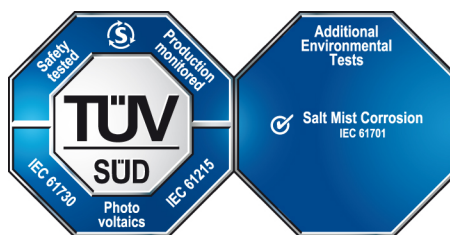

Product: **Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**
Mono-crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the Testing, Certification, Validation and Verification Regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 701262517502-00

Valid until: 2029-07-03

Date, 2025-08-12

(Zhulin Zhang)

CERTIFICATE

No. Z2 115676 0007 Rev. 00

Model(s):

S4-DGxxx-144P-BC-W (xxx=585 to 655, in steps of 5);
S4-DGxxx-144BC-W (xxx=625 to 660, in steps of 5);
S4-DGxxx-120BC-W (xxx=520 to 550, in steps of 5);
S4-DGxxx-108BC-W (xxx=475 to 495, in steps of 5);
S4-DGxxx-144BC-HJT-W (xxx=650 to 680, in steps of 5);
S4-DGxxx-132BC-HJT-W (xxx=595 to 625, in steps of 5);
S4-DGxxx-120BC-HJT-W (xxx=540 to 570, in steps of 5);
S4-DGxxx-108BC-HJT-W (xxx=485 to 515, in steps of 5);
S4-DGxxx-96BC-HJT-W (xxx=430 to 460, in steps of 5);
S4-DGxxx-72BC-HJT-W (xxx=320 to 350, in steps of 5);
S4-DGxxx-64BC-HJT-W (xxx=280 to 310, in steps of 5);
S4-DGxxx-144BC-FB (xxx=625 to 655, in steps of 5);
S4-DGxxx-108BC-FB (xxx=460 to 495, in steps of 5);
S4-DGxxx-144BC-HJT-FB (xxx=650 to 680, in steps of 5);
S4-DGxxx-132BC-HJT-FB (xxx=595 to 620, in steps of 5);
S4-DGxxx-120BC-HJT-FB (xxx=535 to 565, in steps of 5);
S4-DGxxx-108BC-HJT-FB (xxx=480 to 510, in steps of 5);
S4-DGxxx-96BC-HJT-FB (xxx=425 to 455, in steps of 5);
S4-DGxxx-72BC-HJT-FB (xxx=315 to 345, in steps of 5);
S4-DGxxx-64BC-HJT-FB (xxx=280 to 310, in steps of 5);
xxx is standing for rated output power at STC.

Parameters:

| | |
|--------------------------------|--|
| Test method of Salt mist test: | Test method 6 |
| Safety Class: | Class II |
| Maximum System Voltage: | 1500 V DC |
| Construction: | Framed or frameless, with Junction box, cable and connector. |
| Fire Safety Class: | Class C according to UL790 |

Tested according to:

IEC 61215-1:2021
IEC 61215-1-1:2021
IEC 61215-2:2021
IEC 61730-1:2023
IEC 61730-2:2023
IEC 61701:2020